

Specifications

ENGINE

Description	BS -VI SLT6
Displacement	3455 cc
Engine Type	4-Cylinder In-line CRDI (Common Rail Direct Injection) Diesel Turbocharger with Intercooler

PERFORMANCE

Power (Max.)	75 kW @ 2600 rpm
Torque (Max.)	310 Nm @ 1500 ± 100 rpm

TRANSMISSION

Gear Box	Manual Synchromesh (5 - Forward & 1 - Reverse)
Clutch	Single Plate Dry Diaphragm type

ELECTRICALS

System Voltage	12 V
Battery Rating (Voltage & Current)	12 V & 120 A/h

STEERING

Type	Recirculating Ball Type - Power Steering
------	--

SUSPENSION

Type	Semi-Elliptical with Multi-leaf Springs
Shock Absorbers	Hydraulic Double Acting & Telescopic Dampers (Front & Rear)

BRAKES

Service Brakes	Vacuum Assisted Dual Circuit Pneumatic (Air Brakes)
Parking Brakes	Mechanical Expanding Type on Rear Wheels
Auto Slack Adjustor	Provided
ABS	Provided

DIMENSIONS

Wheel Base (mm)	4240
Overall Length (mm)	8291
Overall Width (mm)	2262
Overall Height (mm)	3060


SEATING LAYOUT

No. of Seats - Options	
3 X 2 (School Bus Seats)	40+1 / 42+1
2 X 2 (Semi Reclining Highback Seats)	27+1+1 / 29+1+1

TYRES

No. of Tyres	6+1
Tyres Size	8.25X16 - 16PR

Stay Updated with
SML EduConnect

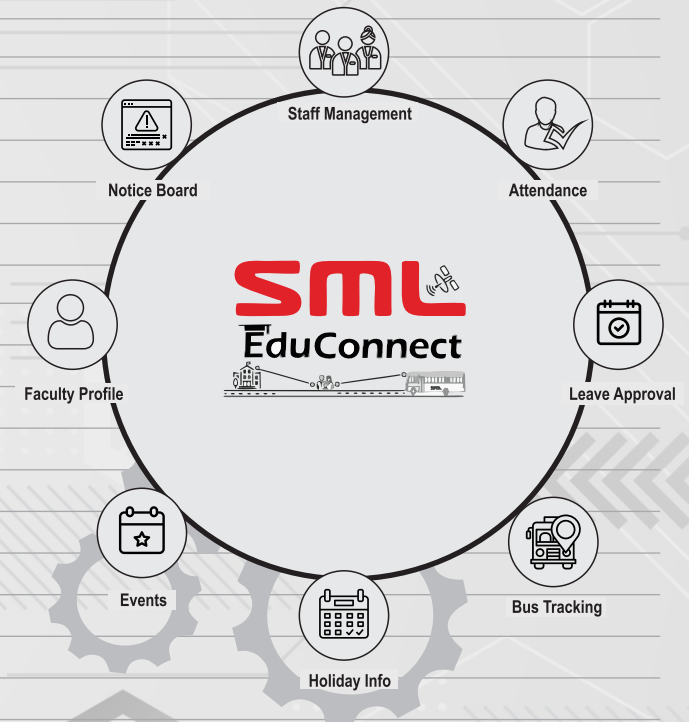

Sliding Glass Variant Also Available with AC

Disclaimer: The specifications given in the table above may change without any prior notice, as per company policy of the continues improvement of its Products & Service. The product photographs used in this brochure are for indicative or reference purpose only. The original product may vary.