

TECHNICAL SPECIFICATIONS

ENGINE

Model	BS VI SLT6
Type	Diesel Engine Direct Injection Turbo-charged with Inter Cooler (In line 4 cylinders)
Displacement	3455 cc
Power	75 kW @ 2600 rpm / 85 kW @ 2600 rpm*
Torque	310 Nm @ 1500 rpm / 400 Nm @ 1500 rpm*

ELECTRICALS

System Voltage	12 V
Battery Rating (Voltage, Current)	12 V, 70 A/h

STEERING

Power Steering	Yes
Type	Recirculating Ball Type

DRIVE TRAIN

Clutch Type	Dry Single Plate
Transmission	5 Forward + 1 Reverse

SUSPENSION

Type	Semi-Elliptical with Multi Leaf Springs
Shock Absorbers	Hydraulic Double Acting & Telescopic Dampers (Front & Rear)

BRAKES

Service Brakes	Dual Circuit Vacuum Assisted Pneumatic (Air Brakes)
Auto Slack Adjuster	Provided
ABS	Provided

TYRES

Tyre Size	6 + 1, 8.25 x 16 - 16 PR
-----------	--------------------------

FUEL TANK

Capacity	90 litres
----------	-----------


DIMENSIONS

Wheel Base	4240 mm	5100 mm
No. of Seats		
Reclining Pushback (2x1)	19+1 / 21+1	25+1 / 27+1
Semi-reclining Highback (2x2)	28+1 / 30+1	36+1 / 38+1
Overall Length	8291 mm	9650 mm
Overall Width	2262 mm	2262 mm
Overall Height	3060 mm	3060 mm


Disclaimer: The specifications given in the table above may change without any prior notice, as per company policy of the continues improvement of its Products & Service. The product photographs used in this brochure are for indicative or reference purpose only. The original product may vary.

ILLUSTRATED BUS SEATING LAYOUTS

FULLYBUILT EXECUTIVE LX COACH

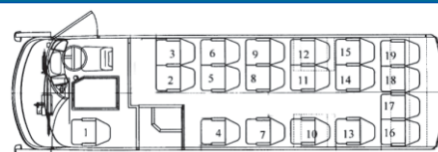

19 + 1 Seats

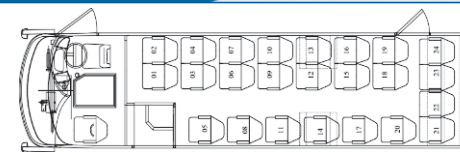

25 + 1 Seats



28 + 1 Seats



38 + 1 Seats

*Available for 5100 mm wheel base